

User Interface Aspects of a Human-Hand Simulation System

Beifang YI

Department of Computer Science and Engineering
University of Nevada, Reno
Reno, NV, 89557, USA

Frederick C. HARRIS, Jr.

Department of Computer Science and Engineering
University of Nevada, Reno
Reno, NV, 89557, USA

Sergiu M. DASCALU

Department of Computer Science and Engineering
University of Nevada, Reno
Reno, NV, 89557, USA

Ali EROL

Department of Computer Science and Engineering
University of Nevada, Reno
Reno, NV, 89557, USA

ABSTRACT

This paper describes the user interface design for a human-hand simulation system, a virtual environment that produces ground truth data (life-like human hand gestures and animations) and provides visualization support for experiments on computer vision-based hand pose estimation and tracking. The system allows users to save time in data generation and easily create any hand gestures. We have designed and implemented this user interface with the consideration of usability goals and software engineering issues.

Keywords: GUI, User Interface Design, Virtual Reality, Software Engineering, HCI.

1. INTRODUCTION

In some human-computer interaction (HCI) applications, traditional controlling and navigating devices, such as keyboard, mouse, and joystick, become cumbersome and unsuitable for the communication between man and machine. One of the most promising natural HCI tools is to use direct sensing and interpretation of human hand motion [9, 15, 17, 16]. In order to take advantage of this new input modality, emphasis has been on vision-based studies, hand modeling, tracking, and gesture recognition [3, 5, 6, 11, 14].

Because computer users increasingly demand an ease-of-use environment for complicated tasks, it is critical to design and implement an effective user interface that wraps up all the task operations and provides a user-friendly environment for these tasks. Most of the vision-based hand-tracking projects have no, or poorly-designed, user interfaces (UIs). This paper introduces some of our work in this area. A 3D, life-like hand constructed

in a virtual environment is the base of a graphical user interface (GUI), which we call Virtual Hand.

Virtual Hand simulates the human hand motion by modifying the angular parameters (i.e., finger joint angles) of the kinematic hand model. This software produces ground truth hand-pose data and corresponding images for use in computer vision experiments. It also produces ground truth data for the hand for use in computer vision experiments [16]. The UI design and implementation for this simulation system followed accepted standards in UI design and software engineering.

The organization of this paper is as follows: Section 2 briefly discusses the related work and the construction of the Virtual Hand, which is a prerequisite for the UI design. Section 3 describes the UI design issues and then gives UI software specifications such as requirements analysis, use cases, and scenarios. Section 4 presents UI design aspects with some prototypes and results. Section 5 gives conclusions.

2. RELATED WORK

The Virtual Hand is a 3D, life-like hand together with the environment in which the hand is placed. It can be used in computer vision research on the human hand in the areas of hand gesture analysis, recognition and tracking. There are two different applications of Virtual Hand. One is the production of ground truth data of the hand. Testing and development of vision-based hand tracking algorithms need many images of a normal hand taken from different viewing directions with various camera parameters under certain (fixed) environmental conditions and the corresponding 3D hand pose parameters. It is very difficult, if not impossible, to ask a person to hold his hand in a fixed hand gesture for several minutes in order to move the camera to predefined locations in 3D space or to keep the

illumination uniform in every direction. But in a virtual environment, with a life-like hand, we can define accurately any hand gestures, camera position, viewing geometry, and illumination configuration, and thus create hand images based on these parameters.

Another application of Virtual Hand is visualization. Once hand gestures are recognized and tracked, we need to display a virtual hand in a 3D virtual environment. Also, we can generate hand gesture animations by defining a sequence of hand gestures.

Hand modeling is based on results from hand biomechanic studies and techniques in computer graphics. We can think of the human hand as a machine with joints [2]. The motion of the hand involves the movement of the rigid parts which are connected to the joints. The structure of the hand can thus be visualized as in Figure 1. From this figure, we see that each of the fingers (index, middle, ring, and pinky) and the thumb have three joints with the joint names and the number of DOFs (degrees of freedom) marked beside the joints. The human hand has 27 DOFs.

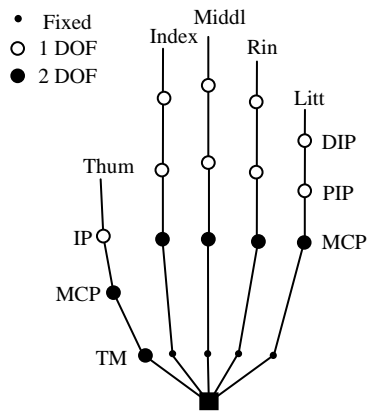


Figure 1: The stick representation of the hand structure with joints

One DOF corresponds to one movement of a joint, and there are three possible movements at a joint: bending (flexion), side-to-side (abduction), and rotation (twist). These three movements can be described as rotations around certain axes. Detailed description and measurement of hand joint motions are given in [4] and [8]. By giving different rotation angles for hand joints, we can model various hand gestures. Two such hand gesture snapshots are shown in Figure 2. More information about hand modeling and hand gesture design can be found at <http://www.beifang.info/RActivities/HCI/vHand/>.

The large number of DOFs in the hand and various situations in the virtual environment make it awkward to adjust hand joint parameters for a correct hand gesture by using traditional keyboard input or a predefined parameter text file. Therefore there is a need to create a GUI for such a task.

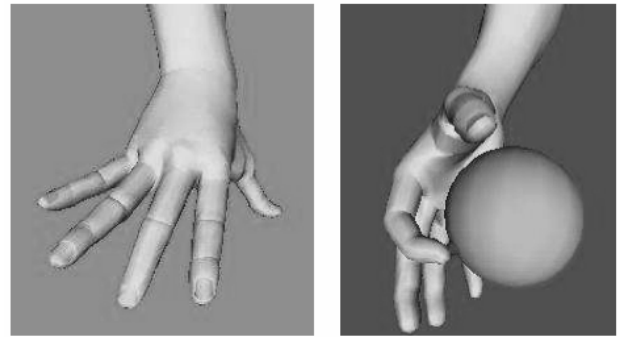


Figure 2: Virtual hand (environment) snapshots

3. USE INTERFACE DESIGN ISSUES AND SPECIFICATIONS

In this section, we describe the design issues, requirements, use cases, and scenarios for the UI system. The specifications follow the formats proposed in [1,10,12].

User Interface Design Issues

The intended users of the simulation system include not only computer vision researchers who do experiments on human hand gesture recognition, but also those people who are interested in hand animation and want to produce a sequence of hand gesture images. As a general principle, the user interface should be designed by assuming that the program model (how the program runs) should conform to the user model (the way users think the program should behave) [13].

- Therefore, our UI design should consider the following issues:
- The design should reflect the features of the hand model and emphasize the convenient manipulation of the hand and its joints.
- Because the graphical library used for hand modeling is multi-platformed, the software package should be able to run in multi-platforms.
- Display of the virtual hand will be from eight fixed cameras at the corners of a virtual cube in which the hand resides in the center. There should also be a movable camera so that we can look at the hand from any viewpoint.
- There should be interfaces for producing natural hand gestures by controlling the hand joints, for testing the hand's (inverse) kinematics, for calibrating the virtual hand with a real hand in the real world, and for recording the hand gesture image sequences (animation).
- There should be interfaces for displaying and recording hand (rendering) parameters such as the hand poses, hand location, joint angles, and OpenGL matrices for hand rendering.

There should be interface for adjusting the cameras' parameters, setting the environment (for example, background), and hand materials.

As for the usability, the program should be easy to learn. Once the user starts the program, he/she should know how to control hand joints, adjust/choose cameras, display the effect, and record the images immediately. The user should not have to remember anything to use the system. There should be ``what-

is" (the question mark) tips to help user for relatively complicated operations. The menu (commands) design should follow the styles in popular softwares such as Microsoft Office and Linux's OpenOffice.

Making hand gestures is a natural behavior, so the system should provide a convenient operational process to generate hand gestures. The GUI items should give some kind of affordance and good mapping. Different control operations should be clearly visible and the effect and actions (feedback) should be accurately displayed in the displaying windows.

Functional and Non-Functional Requirements

The functional requirements for our UI system are:

1. A hand model should be constructed which allows for rotations, translations, scaling, and rotational angle adjustments at hand joints. The virtual hand should be at the center of a virtual box when the system starts up.
2. A large display window and several small ones are needed for displaying the hand from different view points. These windows should be combined with other GUI control widgets into a single interface.
3. There should be eight cameras fixed at the corners of the box and one mobile camera that can be set up by the user. There should be GUI widgets for choosing and controlling these cameras.
4. The system should have GUI widgets to control hand joint rotation angles for all the DOFs.
5. There should be an image (sequence) recording mechanism in which users can set up the image size, speed and duration (in animation), file names, and image format. Also, the corresponding hand and OpenGL parameters with the images should be recorded in text files.
6. The system should provide interfaces for calibration of the hand and testing hand (inverse) kinematics.
7. The system should allow the user to choose background colors, set illumination conditions, and specify materials for rendering the virtual hand. For example, sometimes different parts of the hand need to be represented with different colors.

Sveral non-functional requirements are as follows:

1. The end product should be able to run on a variety of platforms such as Windows, Linux, and Unix.
2. The users of the system should include both well-trained computer scientists and computer novices.
3. The output image sequences and their corresponding parameter text files should have intuitive names, so that users can easily find the files they want.

Use Case Modeling

The main use case diagram for the hand simulation system is shown in Figure 3.

One of the use cases in the diagram, *CreateGestures*, might involve the following:

1. The user chooses *createGestures* tab and goes into an interface.
2. The user selects one of the four fingers or the thumb.
3. The user selects one of the four finger/thumb joints.
4. The user selects one of the movements: flexion (bending), abduction (side-side), and rotation (twist).

5. The user types in the rotational angles or uses a slide-bar to modify the angles.
6. The hand model will be updated according to the user's inputs.
7. The user repeats the above steps until he produces the desired gesture.
8. If the user chooses to store the gesture in the gesture database:
 - The system asks for a gesture name.
 - The user types in the name.
 - The system asks for the gesture type.
 - The user types in a new type or chooses one from the list of current gesture types.
 - The system stores the gesture in its database.
9. A new gesture is displayed.

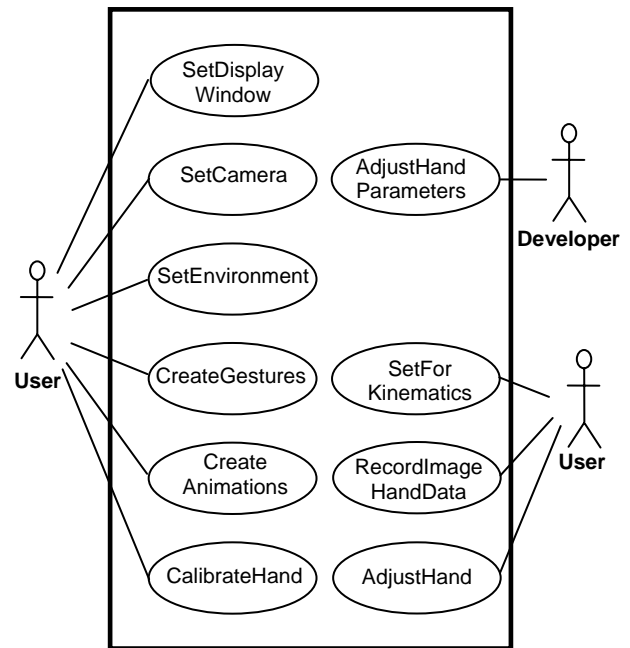


Figure 3: The system use case diagram

Two use cases (with primary and secondary scenarios for each of them) are presented in Figures 4-7. Figures 4 and 5 show the use case *CreateAnimations*' primary and secondary scenarios. Figures 6 and 7 show the use case *RecordImageHandData*'s primary and secondary scenarios.

4. DESIGN ASPECTS

An Overview

The basic concept in the UI design for a human-hand simulation environment is the interaction between the user and the virtual environment. Figure 8 illustrates the design architecture.

Assumption

The assumption for the UI design is that a hand model has been constructed: a C++ class named **Hand** is created with a cross-platform graphical library, **Coin3d**. We also assume that **Hand** has provided all APIs for operations on the virtual hand such as:

- Displace the hand to a location.
- Rotate the hand to a direction.
- Assert various kinds of movements at any hand joints in the ranges of natural hand movements.
- There are (OpenGL) rendering parameters (matrices) corresponding to the hand (joint) movements, and these parameters can be read out.
- The virtual hand is rendered and displayed with predefined parameters.

Use case: CreateAnimations
ID: UC15
Actors: User
Preconditions: 1. The user has chosen to create animation
Primary scenario: 1. The use case begins when the user selects CreateAnimations. 2. The system displays the CreateAnimations interface. 3. The user types in the time duration (seconds) in a text-box labeled with "animation duration". 4. The user types in or chooses animation speed (frames per second) in a text-box labeled with "animation frequency". 5. The user selects a certain animation design in "Design Animations". 6. The system begins creating the animation. 7. The system reminds the user to store the animation process.
Secondary scenarios: DesignAnimationFromGestures DesignAnimationByHandJoints
Postconditions: 1. The system stores the created animation.

Figure 4: Primary scenario of the use case *CreateAnimations*

Use case: CreateAnimations
Secondary scenario: DesignAnimationByHandJoints
ID: UC17
Actors: User
Preconditions:
Secondary scenario: 1. The use case begins in step 5 of the use case CreateAnimations when the user chooses to design hand animation by defining every hand joint movement. 2. The user chooses a hand joint. 3. The user chooses one movement (abduction, flexion, or rotation) for this joint. 4. The user types in the starting angle for this movement. 5. The user types in the ending angle for this movement. 6. The user types in the time duration for this movement. 7. Go to step 2 if the user wants to design the movement for another hand joint. 8. The system finishes the design of the animation.
Postconditions:

Figure 5: Secondary scenario of the use case *Create-Animations*

Use case: RecordImageHandData
ID: UC18
Actors: User
Preconditions: The user has chosen to record hand image and data.
Primary scenario: 1. The use case begins when the user selects RecordImageHandData. 2. The system displays the RecordImageHandData interface. 3. The user types in or chooses the image width and height (pixels) in their corresponding input text-box widgets. 4. The user chooses a camera from a camera from the "Camera list" combo widget. 5. If the user chooses to record one single image: 5.1. Go to "RecordSingleImage". 6. If the user chooses to record an image sequence: 6.1. Go to "RecordImageSequence". 7. If the user chooses to record hand rendering (OpenGL) parameters: 7.1. Go to "RecordRenderData". 8. The system finishes the recording process.
Secondary scenarios: RecordSingleImage RecordImageSequence RecordRenderData
Postconditions: The system records the hand image sequences and the related hand rendering data.

Figure 6: Primary scenario of the use case *RecordImageHand-Data*

Use case: RecordImageHandData
Secondary scenario: RecordRenderData
ID: UC20
Actors: User
Preconditions:
Secondary scenario: 1. The use case begins in step 7 of the use case RecordImageHandData when the user enters recording hand rendering (OpenGL) parameters. 2. The system stores the center of the virtual box in which the virtual hand resides. 3. The system stores the hand poses (the direction of the whole hand, all rotational angles of all the hand joints). 4. The system reads in and stores the OpenGL rendering matrices. 5. The system finishes recording all these data.
Postconditions: All data is recorded

Figure 7: Secondary scenario of the use case *RecordImage-HandData*

Also, we will use the GUI toolkit *Qt* for UI design and a software package *SoQt* to connect UI packages with the rendered images of the hand model.

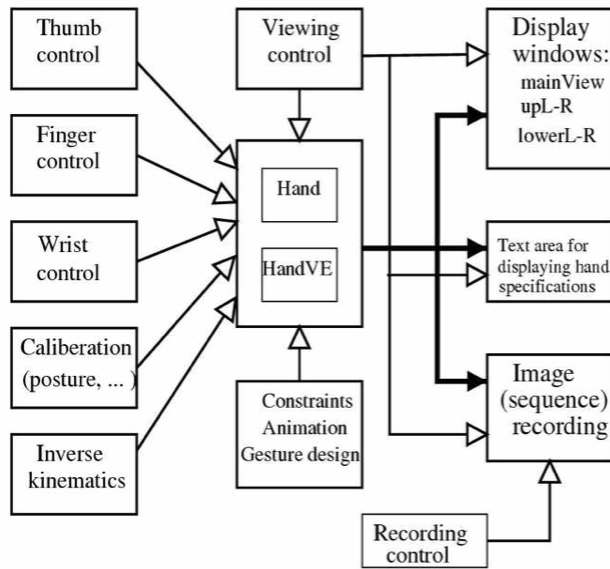


Figure 8: Virtual hand user interface design architecture

Conceptual models

The system will be mainly based on an instructing model and manipulating and navigating models.

- Instruction model: the user gives instructions directly not with command line environment but by manipulating widgets such as buttons, slide-bars, combo boxes, dials, checkboxes, and radio buttons.
- Manipulation and navigation model: direct manipulation will be used for selecting and operating on any part of the virtual hand in the displaying window. Other operations in this conceptual model include setting the virtual environment and choosing and designing hand gestures.

Interface metaphors and affordance

This system provides direct denotations for the operations. When the system is started up and the interface is displayed, many GUI widgets such as those described above are available to control and adjust the virtual hand. Intuitive names for these widgets indicate their function.

Key elements and characteristics

HCI design principles for this simulation system will follow the guidelines proposed in [10]. UI design rules and programming experiences given in [13] are applied as much as possible in the design process. The key rules and guidelines include:

- Keep the program model in line with the user model (the users' mental understanding of what the program will do for them).
- Consistency issues. For example, menu commands should follow the common way.
- Effective interface layout.
- Users don't have to read operation instructions to operate the virtual hand, and no operation process has to be


remembered. For some more complicated operations, we used *Qt's Tooltips* and "What's This" Windows as a guidance for the operation. The widgets are laid out in such a way that users can use a mouse to point to them and move them easily.

Results


We present two high-fidelity prototypes as results. They are nearly the same as the control panels in our user interface for the system. More results, including demos, can be found at <http://www.beifang.info/RActivities/HCI/vHand/>.

Use case *CreateGestures* prototype

Once the user chooses *CreateGestures* tab and selects one of the four fingers or the thumb, the interface appears as in Figure 9.

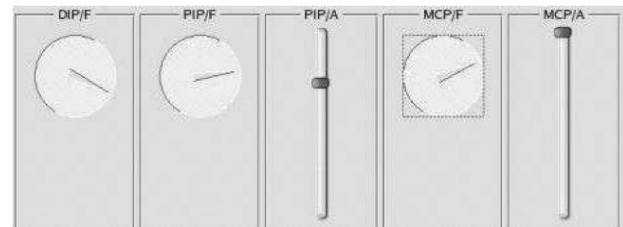

(a) Selection of thumb

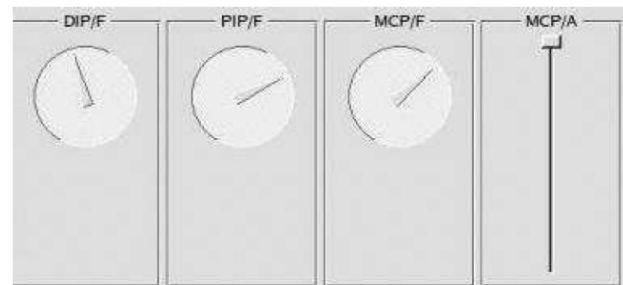

(b) Selection of finger

Figure 9: Panels for the use case *CreateGestures*

Use case *RecordImageHandData* prototype

Figure 10 shows the use case *RecordImageHandData* prototype (control panel). The user can use this panel to record hand gestures in image format and their corresponding OpenGL parameters. Also, the hand animation process can be recorded at different speeds. The controlling parameters include speed choice, image size, camera selection, and rendering styles.

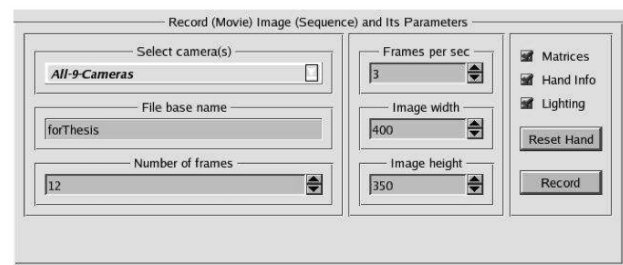


Figure 10: Use case *RecordImageHandData*'s panel

Use case *SetCamera* prototype

Use case *SetCamera*'s prototype (controlling panel) is shown in the lower part of Figure 11. With this panel, the user can select a camera and its corresponding display window, adjust the camera's parameters, and move the camera in the virtual environment.

Layout

A screenshot of the Virtual Hand System showing the interface layout is presented in Figure 11.

5. CONCLUSIONS

We have designed and implemented a user interface for a human-hand simulation environment, with emphasis on usability goals and UI design issues. Hand modeling and its

application in computer vision research is not new, but the construction of a good user interface for the purpose of effectiveness, efficiency, and ease of use is relatively new. In this paper we have presented our work on this direction.

We have already combined this system with the output from several modules related to hand tracking and computer vision. The goal is to set up a virtual glove box to train scientists preparing to go to the International Space Station [7,16]. Results are encouraging and show the flexibility of our interface and design.

ACKNOWLEDGEMENT

This work has been partially supported by NASA under grant NCC5-583.

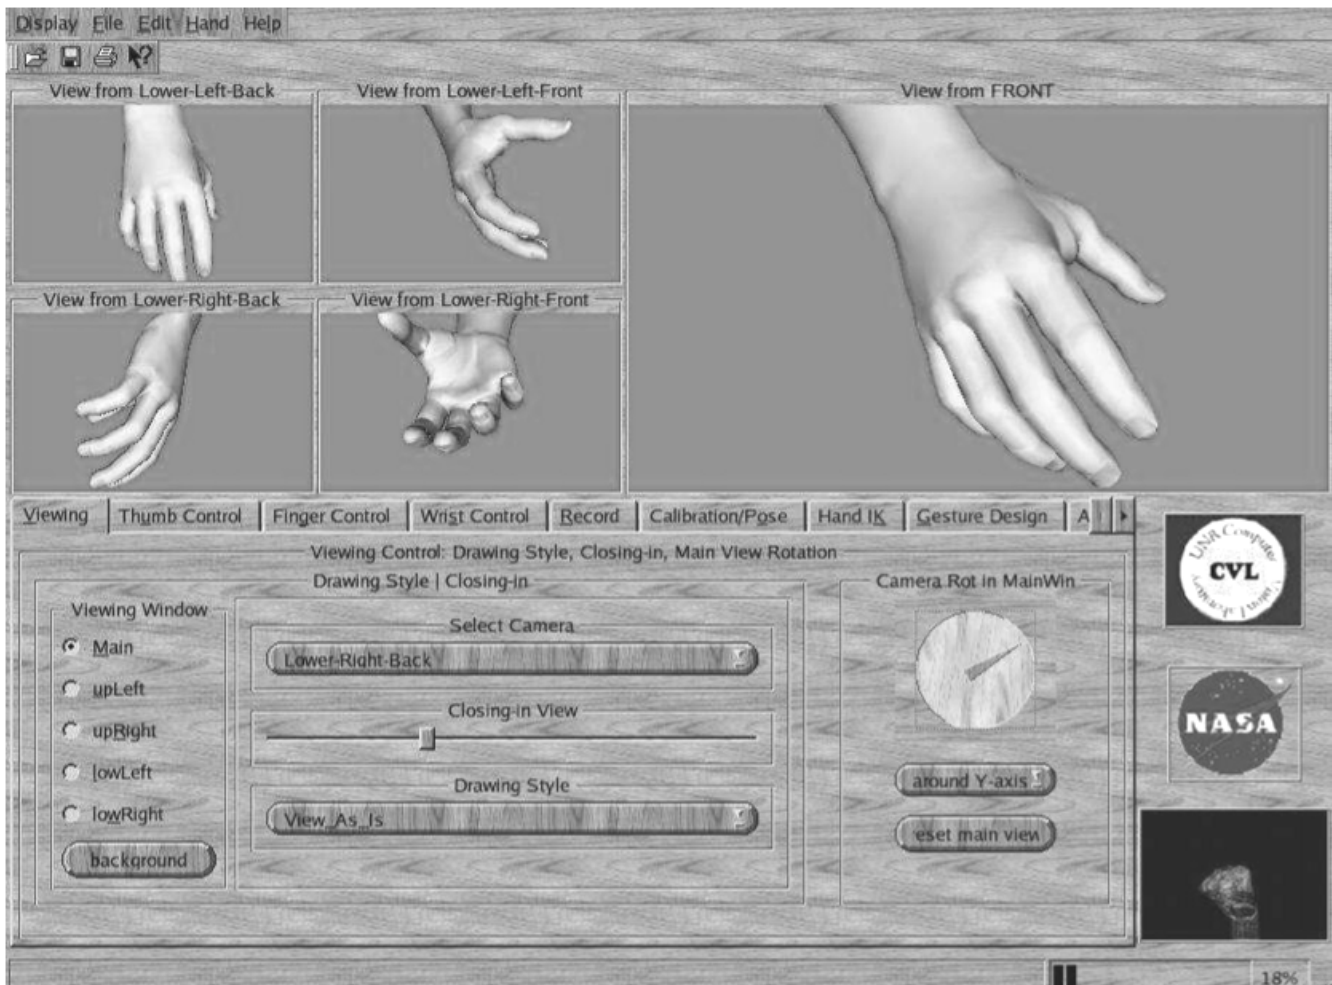


Figure 11: The interface of the simulation system

REFERENCES

- [1] Jim Arlow and Ila Neustadt. **UML and the Unified Process: Practical Object-Oriented Analysis and Design**. Addison-Wesley Professional, December 2001.
- [2] Paul W. Brand. **Clinical Mechanics of the Hand**. The C. V. Mosby Company, 1985.
- [3] L. Bretzner, I. Laptev, T. Lindeberg, S. Lenman, and Y. Sundblad. **A Prototype System for Computer Vision Based Human Computer Interaction**, Report ISRN KTH/NA/P-01/09-SE, April 2001.
- [4] Edmund Y. S. Chao, Kai-Nan An, William P. Cooney III, and Ronald L Linscheid. **Biomechanics of the Hand: A Basic Research Study**. World Scientific Publishing Co. Pte. Ltd.
- [5] Hitoshi Hongo, Mamoru Yasumoto, Yoshinori Niwa, Mitsunori Ohya, and Kazuhiko Yamamoto. Focus of attention for face and hand gesture recognition using multiple cameras. In **FG '00: Proceedings of the Fourth IEEE International Conference on Automatic Face and Gesture Recognition 2000**, page 156, Washington, DC, USA, 2000. IEEE Computer Society.
- [6] Nebojsa Jovic, Thomas Huang, Barry Brumitt, Brian Meyers, and Steve Harris. Detection and estimation of pointing gestures in dense disparity maps. In **FG '00: Proceedings of the Fourth IEEE International Conference on Automatic Face and Gesture Recognition 2000**, page 468, Washington, DC, USA, 2000. IEEE Computer Society.
- [7] Javier Martinez. **Rendering Optimizations Guided by Head-Pose Estimates and Their Uncertainty**. Master's thesis, University of Nevada, Reno, August 2005.
- [8] American Academy of Orthopaedic Surgeons. **Joint Motion: Method of Measuring and Recording**. Churchill Livingstone, New York, 1988.
- [9] Vladimir I. Pavlovic, Rajeev Sharma, and Thomas S. Huang. Visual interpretation of hand gestures for human-computer interaction: A review. **IEEE Transactions on Pattern Analysis and Machine Intelligence**, 19(7):677-695, 1997. IEEE Computer Society.
- [10] Jennifer Preece, Yvonne Rogers, and Helen Sharp. **Interaction Design: Beyond Human-Computer Interaction**. John Wiley & Sons, Inc, 2002.
- [11] F. K. H. Quek and M. Zhao. Inductive learning in hand pose recognition. In **FG '96: Proceedings of the 2nd International Conference on Automatic Face and Gesture Recognition (FG '96)**, page 78, Washington, DC, USA, 1996. IEEE Computer Society.
- [12] Ian Sommerville. **Software Engineering**. Addison-Wesley, 7th edition, 2004.
- [13] Joel Spolsky. **User Interface Design for Programmers**. Apress, 2001.
- [14] Thad Starner, Joshua Weaver, and Alex Pentland. Real-time american sign language recognition using desk and wearable computer based video. **IEEE Transactions on Pattern Analysis and Machine Intelligence**, 20(12):1371-1375, 1998. Available from the World Wide Web: citeseer.ist.psu.edu/starner98realtime.html [accessed February 23, 2006].
- [15] David Joel Sturman. **Whole-hand Input**. PhD thesis, Massachusetts Institute of Technology, February 1992. Available from the World Wide Web: <http://xenia.media.mit.edu/~djs/thesis.ftp.html> [accessed February 23, 2006].
- [16] University of Nevada, Reno, Department of Computer Science and Engineering. **Effective Human-Computer Interaction in Virtual Environments**. Available from the World Wide Web [accessed February 23, 2006]: http://www.cse.unr.edu/CVL/current_proj.php
- [17] Ying Wu and Thomas S. Huang. Hand modeling, analysis, and recognition for vision-based human computer interaction. **IEEE Signal Processing Magazine**, 18(3):51-60, May 2001.